

TECHNICAL SPECIFICATIONS



Dimensions: 55 - 57 cm seat centres
52 cm depth
95 cm height

Backrest: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover, everything is protected by laminated 3D finish with LYF system. Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.


Side panel: Texturized injected polypropylene, 70mm. End row panels completely upholstered. Optional by LYF system or wood. Concealed floor fixation system.

Armrest: Rectangular texturized injected polypropylene by laminated 3D finish with LYF system. Optional by injected polypropylene or wood.

Volume: 0.15 m³

Weight: 17.50 Kg not assembled

DRAWING

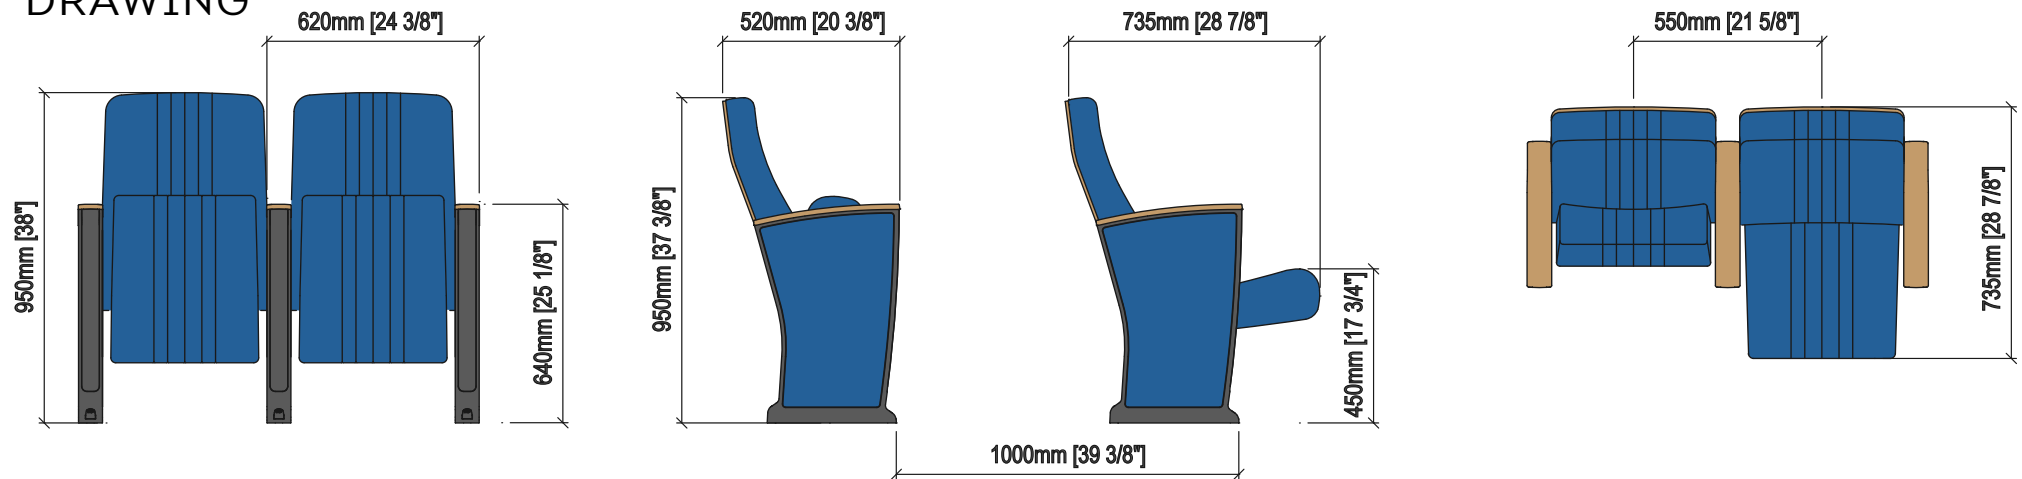

OPTIONS



CERTIFICATES

BS 5852:2006
 BS-EN 1021-1:2006
 CAL TB 117-2013, SECTION 1
 UNE 23.727-90 1R (M1)
 UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
 BS 5852:1979 Parte 1

Fabrics	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		

AIDIMA
 INSTITUTO TECNOLÓGICO
 MUEBLE, MADERA, EMBALAJE Y AFINES

fmo
 FORMER FURNITURE
 MANUFACTURERS' ORGANIZATION

FIRA
 FURNITURE
 INSTITUTE

BUREAU VERITAS
 Certification

BUREAU VERITAS
 Certification

AENOR
 Ecodiseño
 UNE-EN ISO 14006