

SUMMIT

RADIUS
OFFICE

info@radiusoffice.com
www.radiusoffice.com

EZO
BOARD



MEET SUMMIT


Where Geometry meets Peak Performance!

RADIUS
OFFICE

info@radiusoffice.com
www.radiusoffice.com




The performance of acoustic panels depends on With an incredible acoustic performance of NRC 1.30 material and geometry. (Type A - direct applied), the Summit system perfectly balances high performance acoustics with high design, EzoBord's three-dimensional Summit baffle system high-performance treatment options to the acoustic proves that bringing the right combination of materials panel market. and design-work can lead to astonishing improvements in acoustic performance.

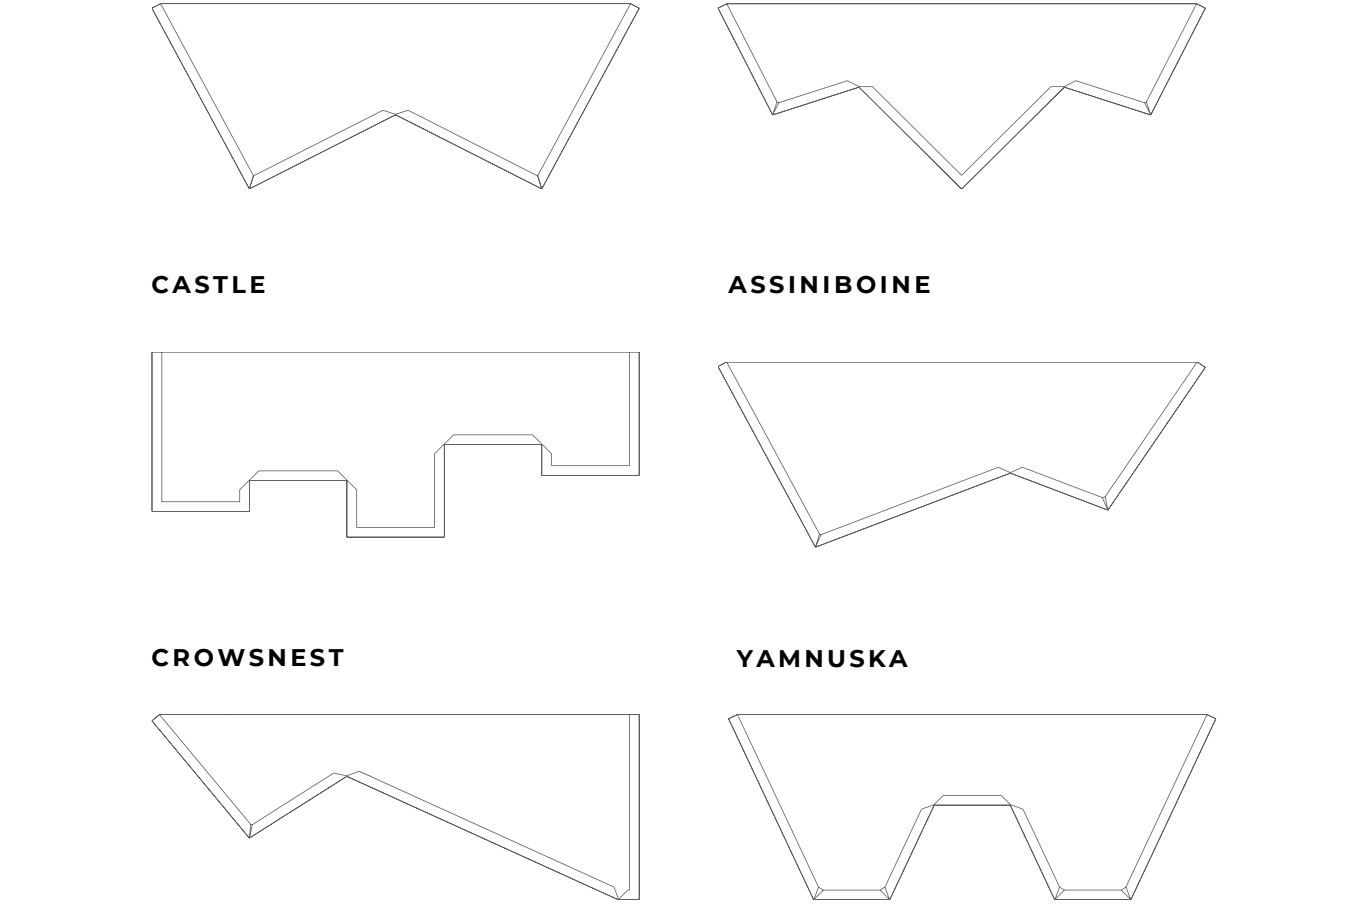

LENGTH	WIDTH	HEIGHT	THICKNESS
95.94" (2436 mm)	23.5"(596mm)	9" (228mm)	1/2" (12mm)

BAFFLE SYSTEMS

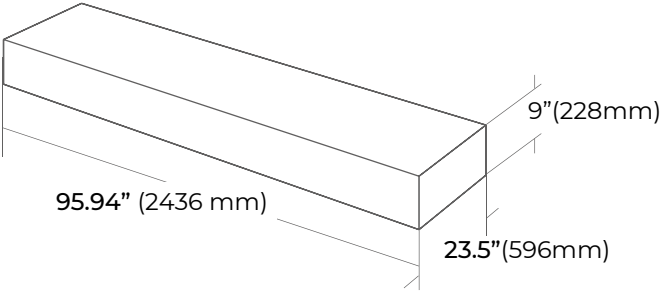

SIZES
Available in one length, height and, width:
length95.94" (2436 mm)
height9" (228mm)
width23.5"(596mm)
thickness1/2" (12mm)
Wood grain print options are available for the body portion only.
Standard 12mm colors are required for all end cap conditions.

COMPOSITIONACOUSTICS
100% pet (min. %50 recycled content)Refer to ASTM C423 test chart for specific absorption rates/frequency.
PRODUCT VARIANCES ½" (12mm): NRC 0.85 (subject to mounting conditions Variation in fiber mix and colour may occur. All products and geometrical properties) will be supplied within commercial tolerances.*(subject to mounting conditions and geometrical properties)*


CLEANINGENVIRONMENT
Remove dust and dirt with a stiff plastic bristle brush. Made of polyester fiber, min. 50% of which comes from Distilled water can be used to remove stains. Always use recycled water bottles which contributes to LEED MR a soft, clean cloth and blot dry. Vacuuming works great Credit and BREEAM Health and Wellbeing, Materials as well,points due to recycled content, acoustic performance, and low emitting materials. No VOC's: CDPH v1.2 and **FIRE TESTING**REACH SVHC Compliant.
north america:
ASTM E-84 Class A*USGBC LEED V4 CREDITS
CAN ULC S102-10While individual products do not 'earn' LEED credits, **europa and uk:**EzoBord can contribute to the following LEED v4 EN13501-1: 2007Credits. Please refer to the USGBC LEED credit guides for detailed requirements.
EQc9 for enhancing acoustic performance

contribution
* Upon request, 1/2"(12mm) sheet material is treated with color options) post-production flame retardant to Class A surface burning characteristics. Post sheet production FR treatment does not contain any Red List Restricted Chemicals and complies with California Proposition 65. Contact customer service for technical information, test data and safety data sheets for flame retardant
MRc3 BPDO for sourcing of raw materials for recycled
EQc6 interior lighting for surface reflectance (lighter

NOISE REDUCTION 1/2" (12MM)

Summit-Yamnuska 4 objects spaced
(corrugated)4 in. apart
SOUND ABSORPTION COEFFICIENTS
(ASTM C423-17)

NRC	125	250	500	1000	2000	4000
1.30	0.81	1.38	2.05	2.30	2.83	3.13

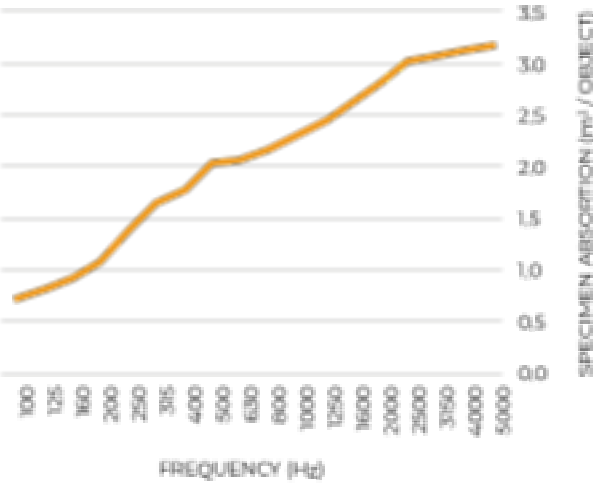

COLOR & FINISHES

COLORS 3/8" (9MM)

				
PURE BLACK PB09	CHARCOAL GRAY CG06	EBONY SLATE ES07	DARK GRAY DG34	SILVER GRAY SG04
				
CLASSIC WHITE CW04	LIGHT BEIGE LB01	DESERT SAND DS10	SUNNY DAYS SD18	TIGER ORANGE TO24
				
RUBY RED RR28	DEEP PURPLE DP30	MIDNIGHT NAVY MN12	POLAR ICE PI14	GREEN APPLE GA41

COLORS 1/2" (12MM)

				
PURE BLACK PB09	CHARCOAL GRAY CG06	BOLD GRAY BG07	ELEPHANT GRAY EG11	SILVER GRAY SG04
				
CLASSIC WHITE CW04	DESERT SAND DS10	TREE BARK TB35	SUNNY DAYS SD18	BRICK RED BR34
				
GRAPE VINE GV36	ROYAL BLUE RB08	POLAR ICE PI14	OCEAN BLUE OB14	MOSS GREEN MG10

RADIUS
OFFICE

info@radiusoffice.com
www.radiusoffice.com



ENVIRONMENT

Our Commitment to the Environment

In 2007, the last year global statistics of oil consumption were available, between 32 million and 54 million barrels of oil were used to produce the bottled water consumed around the world each year, and only about that was consumed in the USA alone. This energy is half of those get recycled. The rest end up in landfills, used to make the bottles from PET pellets (1 million littered through our neighborhoods, or floating in our tons in the USA), treat water, bottle the water, label the oceans, bottles, and transport the bottled water. Most of the


energy consumption occurs in the creation of the bottles themselves. To help in the lifecycle of this plastic since 2000; in 2015 there was the equivalent of more product, we have chosen to manufacture our material than 5 bottles of water consumed for every person in so that it recycles these PET bottles. We are doing our part to reduce the waste. This acoustical and tackable material is made from PET bottles in a zero-waste process with postindustrial recycling. An environmentally friendly, sustainable, and waste reduced alternative to traditional acoustical/tackable material that looks great in any office, education, or open space installation.

EzoBord is



- low VOC
- formaldehyde free

DID YOU KNOW...



For every pound of recycled PET bottles (approximately 23) energy use is reduced by 84% and greenhouse gas emissions are reduced by 71%.

PET BOTTLES



- ± 166 pet bottles are used to make one 3/8" 9mm thick EzoBord sheet.
- ± 318 pet bottles are used to make one 1/2" 12mm thick EzoBord sheet.

RADIUS
OFFICE

info@radiusoffice.com
www.radiusoffice.com



ezo

B O R D

RADIUS

O F F I C E

info@radiusoffice.com
www.radiusoffice.com